


TR-1 Portable Hand Tool Rack Instructions

Thank you for purchasing a TrimmerTrap product. The TR-1 allows the "rack unit" to be removed and switched to another location by pulling a single pin. The TR-1 rack consists of four parts, not including hardware. The four parts are: one upper and lower vertical post and one upper and lower horizontal pieces. The upper pieces (both horizontal and vertical parts) are shorter than the lower pieces. The lower vertical post attaches to the truck or trailer, with the "foot" on top. Attaching hardware must be at least 3/8" Grade 5 bolts and lock nuts. **Due to the many different construction techniques used on trailers, the hardware required to attach the rack is not included and must be acquired by the user.** The post must be drilled in the center from side to side and the two holes should be a minimum of ten inches apart vertically. The "foot" on the top vertical post can then be inserted into the "foot" on the bottom post and secured with the locking pin included. The top post must be slid onto the bottom post with a minimum of two hole positions.

The upper and lower horizontal pieces can now be attached to the top and bottom of the top vertical post. The top piece attaches with two 5/16" x 2" bolts and lock nuts provided. The bottom piece attaches with two 5/16" x 1" bolts and lock nuts provided. Both horizontal pieces attach with the "lip" facing down. The two black clips attach to the lip on the bottom vertical piece at the ends using two 3/16" machine screws and lock nuts included per clip. These clips are for securing a "D" handle tool such as a steel spade.

NOTE: IT IS THE PURCHASERS SOLE RESPONSIBILITY TO ASSURE THAT THE RACK IS INSTALLED SAFELY AND SECURELY TO A COMPONENT THAT WILL ADEQUATELY SUPPORT THE EQUIPMENT.

<u>TR-1 Parts List</u>	<u>Quantity</u>	<u>Part #</u>
5/16" x 1" bolts	two	
5/16" x 2" bolts	two	
5/16" nylon lock nuts	four	
3/16" machine screws	four	
3/16" nylon lock nuts	four	
spring clips	two	TR CL-1
5/16" safety clip	one	TR QC-1

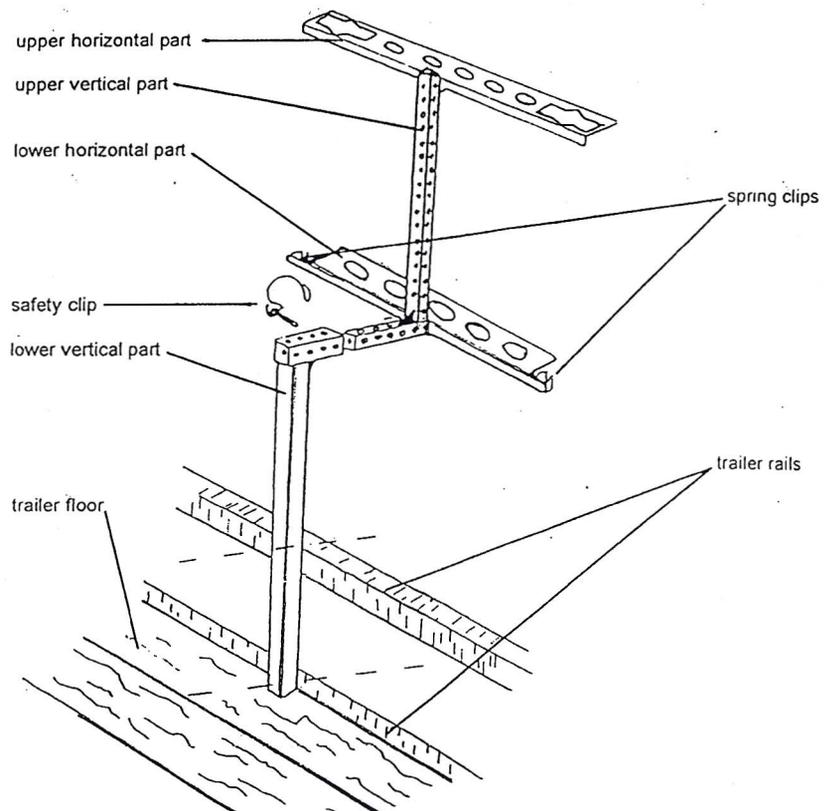

WARRANTY: 90 days against defects in material and workmanship, TrimmerTrap, Inc. reserves the right to repair or replace at its sole discretion the alleged defective TrimmerTrap product. Determination of validity of alleged defect claim will be made upon goods returned to us freight prepaid to our location in Louisville, KY. Call 1-800-279-8727 for a return goods authorization.